

WIRELESS MAGNETIC CALIPER

无线磁栅卡尺



- 智能液晶带背光,大字符高清显示
 - Smart LCD with backlight, large character HD display
- 2节5号电池供电,嵌入式电池仓,更换电池便捷
 - $2\,section\,5th\,battery\,power\,supply,\,built-in\,battery\,compartment,\,convenient\,battery\,replacement$
- 近2米的超长卡量范围,分内卡和外卡两种卡量模式
 - Nearly 2 meters of ultra-long card range, divided into internal card and external card two card mode
- 全铝合金外壳结构设计,磁栅非接触式测量
 - All aluminum alloy shell structure design, magnetic grid non-contact measurement
- 数显表采用两点自膨胀减振型便捷安装方式
 - The digital display meter adopts two-point self-expansion and vibration-damping type and convenient installation method.
- 可实现长距离(约100米)无线收发数据功能(可选配)
 - Long-distance (about 100 meters) wireless data transmission and reception function (optional)
- 德国进口铝型材导轨及滑块,测量顺滑耐用
 - Germany imported aluminum profile rails and sliders, measuring smooth and durable



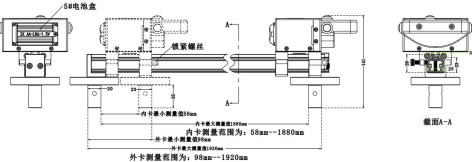

| 特性 features | 技术参数 Technical parameters | 备注 Notes |
|------------------------------------|------------------------------|---|
| 重复精度 Repeatability accuracy | MAX. 0.01mm | |
| 卡量速度 Card speed | Max.2m/s | |
| 卡量范围 Card range | 见尺寸图 See dimension chart | |
| 电源 Power Supply | 2节AA1.5V 2 AA1.5V | |
| 消耗电流 Consumption current | Max.500uA | 寿命约0.5年 Life expectancy is about 0.5 yea |
| 最大外观尺寸 Maximum Appearance Size | 1877X117.8X114.5mm | |
| 传感器防护等级 Sensor protection level | IP67 | |
| 工作温度 Operating temperature | -10 C+60 C | |
| 储存温度 Storage temperature | -30 C+80 C | |



